

325 Watts C and Ku-Band Dual Band Antenna Mount High Power Amplifier



FEATURES

- No Shelter Required
- Short Waveguide Run
- Power Factor Corrected
- High Efficiency Dual-Stage TWT
- Microprocessor M&C Interface

The **XTD-400DBL** series are compact self-contained antenna mountable power amplifiers designed for low cost installation and long life. The **XTD-400DBL** series design eliminates the need for an amplifier shelter as well as a long waveguide run between the amplifier and the antenna feed horn; for example, an antenna mounted 350 Watt amplifier with its shorter waveguide run will often deliver EIRP comparable to a 600 Watt rack mounted HPA. RF filters, cooling, and monitoring & control systems are all self-contained within the HPA. These features provide high reliability, low maintenance costs, and low replacement costs.


The **XTD-400DBL** series incorporates high efficiency, dual-stage collector TWTs. Some of the benefits of this type of TWT are: reduced prime power consumption, lower internal operating temperatures, and reliability enhancement. These benefits are obtained for both the linear and saturated modes of operation. One of the features of the **XTD-400DBL** series is incorporation of power factor correction circuitry that minimizes line current distortion and reduces the required volt-amps. The combination of power factor correction and high efficiency TWTs reduces input Volt-Amps by 45% when compared to equivalent amplifiers. A high frequency resonant conversion power supply is used that accepts a wide range of prime power (100 to 260 VAC). The automatic features of the power supply include quick recovery from prime power outages and multiple helix fault resets (three fault cycles). A complete monitoring & control system is built into the unit. Ten status and fault monitors are provided for external monitoring. The **XTD-400DBL** series can be configured for single thread, redundant, phase combined, or linearized operation. A remote external controller is available to operate the HPA from a user selected location. Mounting brackets can be supplied to mount the HPA to most popular antennas.




PERFORMANCE SPECIFICATION

Parameters	XTD-400DBL C-Band	XTD-400DBL Ku-Band
FREQUENCY RANGE	5.850 to 6.425 GHz	14.0 to 14.5 GHz
OUTPUT POWER		
Traveling Wave Tube		325 W
Rated Power @ Amplifier Flange (minimum)		290 W
GAIN		
Large Signal (minimum)		64 to 71 dB
Small Signal (minimum)		69 dB
Attenuator Range (continuous)		Rated Power -10 dB
Maximum SSG Variation Over		
Any Narrow Band		1.0 dB per 40 MHz
Full Band		± 2.5 dB
Slope (maximum)		± 0.04 dB/MHz
Stability, 24 hr. (maximum)		± 0.25 dB
Stability, Temperature (maximum)	± 1.0/1.5 dB over temperature range at any frequency	
INTERMODULATION (maximum) with two equal carriers	-17 dBc @ 4 dB total output power backoff from rated power	
HARMONIC OUTPUT (maximum)	0 dBc @ 49 dBm	
AM/PM CONVERSION (maximum)	2.5 deg/dB at 6 dB below rated power	
NOISE POWER (maximum)		
Transmit Band		-70 dBW/4 kHz
Receive Band	-70 dBW/4 kHz 3.7 to 4.2 GHz	-70 dBW/4 kHz 10.95 to 12.75 GHz
GROUP DELAY (maximum)		
Bandwidth		Any 60 MHz
Linear		± 0.01 nS/MHz
Parabolic		± 0.005 nS/MHz ²
Ripple		0.5 nS/Pk-Pk
RESIDUAL AM NOISE (maximum)	-50 dBc to 10 kHz -20 (1.5 + logf) dBc 10 to 500 kHz -85 dBc above 500 kHz	
PHASE NOISE (maximum)	10 dB below IESS phase noise profile AC fundamental -50 dBc Sum of all spurs -47 dBc	
VSWR		
Input (maximum)		1.3:1
Output (maximum)		2.2:1

BLOCK DIAGRAM

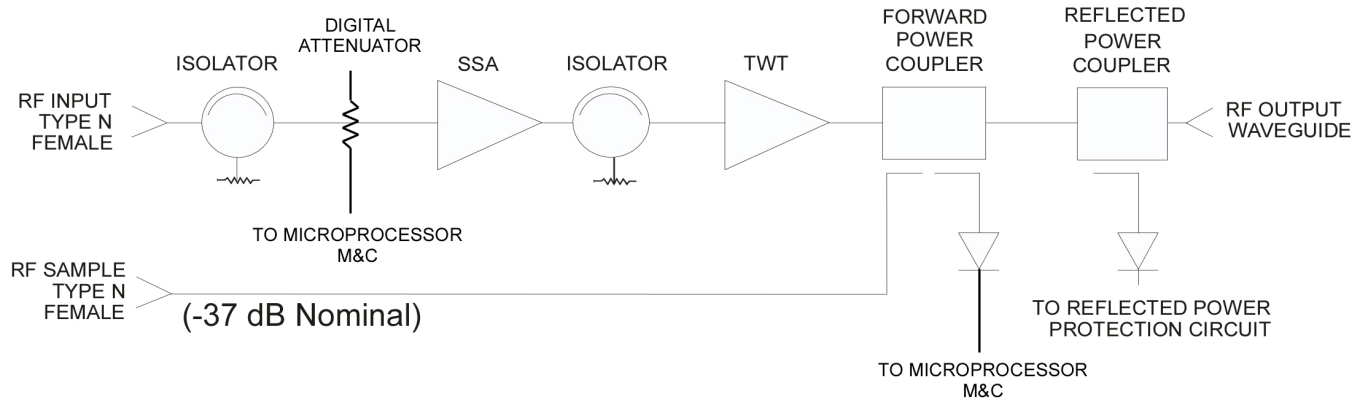

OUTLINE DRAWING

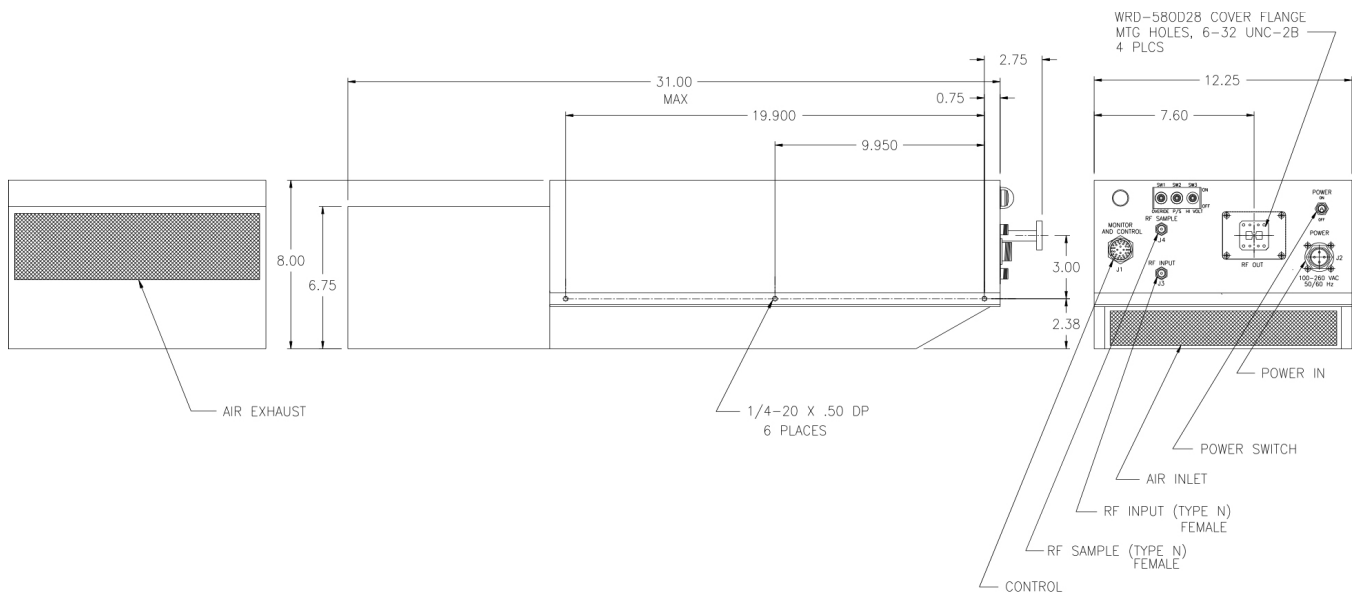

Typical Weight: 60 lbs (27.22 kg)

PRIME POWER

100 to 260 VAC
47 to 63 Hz, Single Phase
2200 VA (maximum)
0.95 Minimum Prime Power Factor



ENVIRONMENT

NONOPERATING TEMPERATURE RANGE	-50°C to +70°C
OPERATING TEMPERATURE RANGE	-40°C to +50°C (2°C/1000 Feet Derating)
HUMIDITY	Up to 100% Condensing
ALTITUDE	10,000 Feet MSL (maximum)
SHOCK AND VIBRATION	Normal Transportation
COOLING	Forced Air

INTERFACE

Type	Function	
LOCAL CONTROL	Prime Power ON/OFF	Local/Remote
	Power Supply ON/OFF	HV ON/OFF
LOCAL STATUS	Tri-Color LED:	
	Fault: Red	Standby: Continuous Amber
	HV ON: Green	FTD: Flashing Amber
REMOTE CONTROL	HV ON/OFF	RF Inhibit (HV OFF)
	RF Attenuation (w/preamp)	Fault Reset
	Heater Standby	
REMOTE STATUS	HV ON	Heater/Beam Hours
	RF Output Power	Fault Identification
	Reflected Power	TWT Temperature
	Filament Time Delay	Helix Current
	Helix Voltage	
FORM C DRY CONTACT CLOSURE	Summary Fault	
RF MONITOR PORT	-37 dB Nominal	

OPTIONS

- Extended Frequency Coverage
- Remote External Controller
- 1:1, 1:2, 1:N Redundancy
- Variable Phase Power Combining
- Integrated Linearizers

Headquarters

Comtech Xicom Technology, Inc.
3550 Bassett Street
Santa Clara, CA 95054
USA

Phone: +1-408-213-3000

Fax: +1-408-213-3001

email: sales@xicomtech.com

Web: www.xicomtech.com

Europe Sales Office

Comtech Xicom Technology Europe, LTD
4 Portland Business Center
Manor House Lane
Datchet
Berkshire SL3 9EG
United Kingdom

Phone: +011 44 (0) 1753 549 999

Fax: +011 44 (0) 1753 549 997

email: sales@xicomeurope.com

Web: www.xicomtech.com

Asia Sales Office

Comtech Xicom Technology
150 Cecil Street
#08-02
Singapore 069543

Phone: +011 65 6325 1953

Fax: +011 65 6325 1950

email: asiasales@xicomtech.com

Web: www.xicomtech.com