

1250 Watt Ku-Band Rack Mount High Power Amplifier



FEATURES

- *Compact 6 RU package*
- *Extended frequency bands available*
- *Menu driven front panel display and control*
- *High efficiency*
- *Linearizer & harmonic/RX filters included*
- *1:1, 1:2, 1:N redundancy - optional built in controller*

The **XTRD-1250KL** is a highly efficient rack mountable traveling wave tube amplifier (TWTA) designed for uplink applications. The unit includes RF gain control, predistortion linearizer, a solid state pre-amplifier, cooling, and monitoring and control (M&C) system. Rack space is conserved because the amplifier occupies only 6 rack units (10.45 inches) of a standard 19 inch rack cabinet.

The unit features a menu driven front panel display and RS-232/422/485 serial port interfaces for complete computer control. Ethernet is also available as an option. RF, traveling wave tube, and default parameters are easily monitored on the 4-line front panel display. Gain control is provided via the front panel or through the serial interface.


The **XTRD-1250KL** incorporates high efficiency, multi-stage collector TWTs. Reliability is enhanced because both prime power consumption and internal operating temperatures are reduced for both the linear and saturated modes of operation. Power factor correction circuitry is also included which minimizes line current distortion and reduces the required Volt-Amps input. The automatic features of the high frequency resonant conversion power supply include quick recovery from prime power outages and multiple helix fault resets (three fault cycles). Depending upon user requirements, the amplifier can be configured for either single thread or redundant system operation.





PERFORMANCE SPECIFICATION

Parameters	XTRD-1250KL
FREQUENCY RANGE	13.75 to 14.5 GHz
OUTPUT POWER	
Traveling Wave Tube (typical)	61.0 dBm (1250 W)
HPA Flange Peak Power (typical)	60.5 dBm (1110 W)
Linear Rated Power, HPA Flange	56.5 dBm (450 W)
Single Carrier Power, HPA Flange (Typical)	57.0 dBm (500 W)
Rated Power @ Amplifier Flange (minimum)	
GAIN	
Large Signal (minimum)	70 dB
Small Signal (minimum)	70 dB
Attenuator Range (continuous)	25 dB
Maximum SSG Variation Over:	
Any Narrow Band	1.0 dB per 80 MHz
Full Band	2.5 dB per 500 MHz
Slope (maximum)	± 0.04 dB/MHz
Stability, 24 hr. (maximum)	± 0.25 dB
Stability, Temperature (maximum)	± 1.0 dB over temperature range at any frequency
INTERMODULATION (maximum) with two equal carriers	-27 dBc @ 450 W total power
HARMONIC OUTPUT (maximum)	-60 dBc
AM/PM CONVERSION (maximum)	2.0 deg/dB at ≤ 450 W
NOISE POWER (maximum)	
Transmit Band	-70 dBW/4 kHz
Receive Band	-150 dBW/4 kHz 3.7 to 4.2 GHz
GROUP DELAY (maximum)	
Bandwidth	Any 80 MHz
Linear	0.01 nS/MHz
Parabolic	0.005 nS/MHz ²
Ripple	0.5 nS/Pk-Pk
RESIDUAL AM NOISE (maximum)	-50 dBc to 10 kHz -20 (1.5 + logf) dBc 10 to 500 kHz -85 dBc above 500 kHz
PHASE NOISE (maximum)	12 dB below IESS phase noise profile AC fundamental -50 dBc Sum of all spurs -47 dBc
VSWR	
Input (maximum)	1.3:1
Output (maximum)	1.3:1

BLOCK DIAGRAM

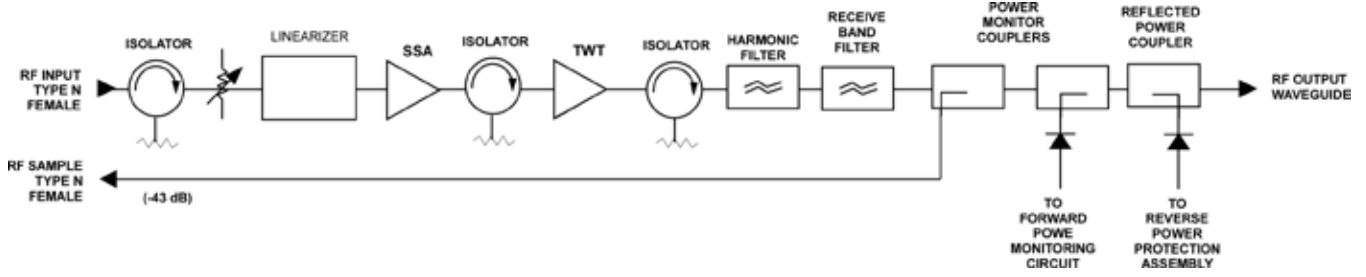

OUTLINE DRAWING

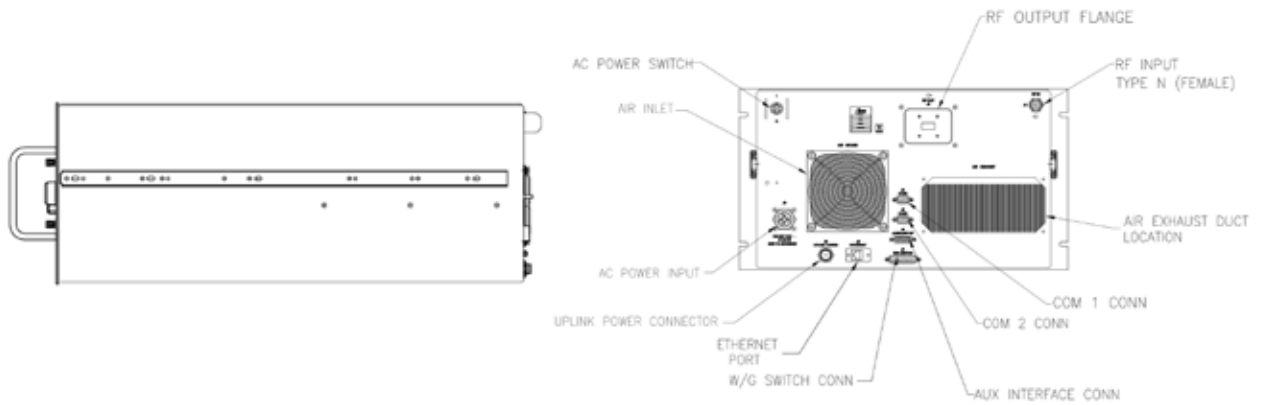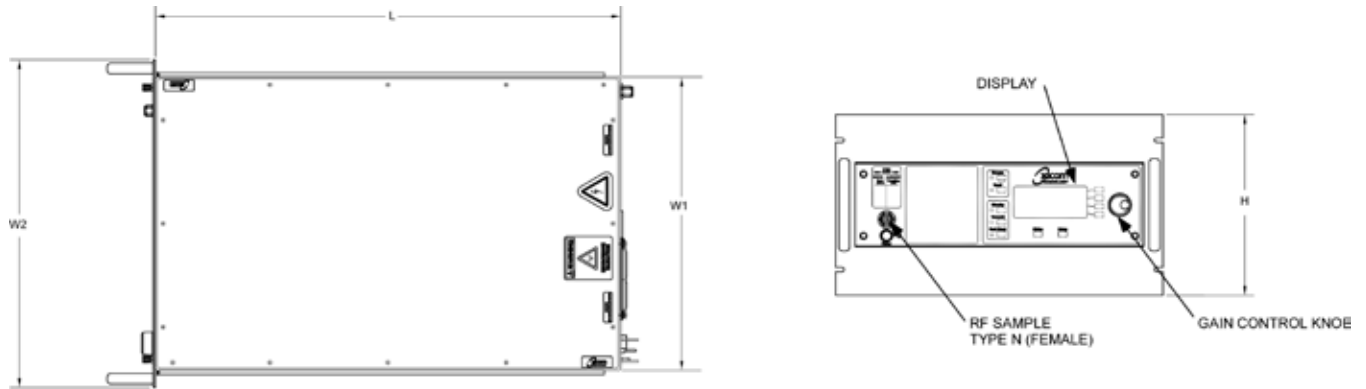

RF OUTPUT	
C-Band	CPR-137G
Ku-Band	WR-75
Nominal Weight: 115 lbs (52.16 kg)	

	DIMENSIONS	
	INCHES	CENTIMETERS
W1	17.00	43.18
W2	19.00	48.26
L	27.00	68.58
H	10.47	26.59

XTRD-1250KL



PRIME POWER

180 to 260 VAC
 47 to 63 Hz, Single Phase
 2300 VA Typical
 0.95 Minimum Prime Power Factor



ENVIRONMENT

NONOPERATING TEMPERATURE RANGE	-50°C to +70°C
OPERATING TEMPERATURE RANGE	-10°C to +50°C (2°C/1000 Feet Derating)
HUMIDITY	Up to 95% Noncondensing
ALTITUDE	10,000 Feet MSL (maximum)
SHOCK AND VIBRATION	Normal Transportation
COOLING	Forced Air: 250 CFM (typical)

INTERFACE

	Type	Function	
CONTROLS	LOCAL	Local/Remote	AC Power On/OFF
	LOCAL AND REMOTE	Gain	Transmit ON/OFF
		Min/Max Power Alarm/Fault	Audio Alarm ON/OFF
		Reflected Power Alarm/Fault	Units (Watts, dBm, dBW)
		Fault Reset	Lamp Test
		Heater Standby ON/OFF	Constant Power
STATUS	FRONT PANEL LEDs	Standby	Power
		Local	Remote
		Summary Fault	High Voltage ON/OFF
		Heater Time Out (FTD)	Heater Standby
	FRONT PANEL DIGITAL DISPLAY	Power Out	Beam Hours
		Reflected Power	Helix Current
		TWT Temperature	Helix Voltage
		Heater Hours	Faults:
			High VSWR High Voltage Helix Current TWT Temperature
	DRY FORM-C RELAY CONTACTS (2)	Summary Fault	
COMPUTER SERIAL PORT	HARDWARE INTERFACE	Two Ports: RS-232 & RS-422/RS-485	
	XICOM COMMAND SET	ASCII Commands	
	RF SAMPLE PORT COUPLING	-43 dB Nominal	

OPTIONS

- Extended Frequency Coverage
- 1:1, 1:2, 1:N Redundancy
- Variable Phase Combined
- Built-in Redundancy Controller
- Ethernet
- Integral L-Band Block Upconverter (BUC)

Headquarters

Comtech Xicom Technology, Inc.
 3550 Bassett Street
 Santa Clara, CA 95054
 USA

Phone: +1-408-213-3000
 Fax: +1-408-213-3001

email: sales@xicomtech.com
 Web: www.xicomtech.com

Europe Sales Office

Comtech Xicom Technology Europe, LTD
 4 Portland Business Center
 Manor House Lane
 Datchet
 Berkshire SL3 9EG
 United Kingdom

Phone: +011 44 (0) 1753 549 999
 Fax: +011 44 (0) 1753 549 997

email: sales@xicomeurope.com
 Web: www.xicomtech.com

Asia Sales Office

Comtech Xicom Technology
 150 Cecil Street
 #08-02
 Singapore 069543

Phone: +011 65 6325 1953
 Fax: +011 65 6325 1950

email: asiasales@xicomtech.com
 Web: www.xicomtech.com

